

Raynger[®] ST[™]

60/80 ProPlus



NEW!
Visualize the target area with
circular laser sighting.

Raytek[®] Infrared Noncontact
Thermometers are the
professional's choice for:

- Automotive and Diesel
- HVAC/R Systems
- Electrical and Industrial
- Facility Maintenance
- Food Safety
- Asphalt Work
- Fire Safety
- Marine Maintenance

The Professional's Choice





When you need more features and higher specifications, choose the Raynger ST ProPlus for your most demanding applications. Advanced infrared technology for reading higher temperatures and powerful optics for measuring smaller areas (or from farther back), make the ProPlus the professional's choice for noncontact temperature measurement. Whether you choose the ST60 or the ST80, gathering temperature data has never been easier. Simply point, shoot and read.

Innovative features like offset eight point circular laser sighting, adjustable emissivity, a wide temperature range, and 12 point data logging, make any temperature measurement application a snap. This rugged unit with rubber overmolding also includes a jack for the optional Raytek ST RTD temperature probe, and can be tripod mounted for hands-free operation.

Choose the infrared noncontact thermometer that millions of professionals use worldwide. Call today and discover the Raytek advantage—fast, easy and safe temperature measurement backed by over 35 years of experience and top-quality customer service.

Specifications and Features

RayngerST




Specifications

Temperature Range	ST60 ProPlus -32 to 600°C (-25 to 1100°F) ST80 ProPlus -32 to 760°C (-25 to 1400°F)
Accuracy @ 23°C (73°F) ambient operating temperature	1% or ±1°C (±2°F), whichever is greater above 23°C (73°F) ±2°C (±3°F) @ -18 to 23°C (0 to 73°F) ±2.5°C (±4°F) @ -26 to -18°C (-15 to 0°F) ±3°C (±5°F) @ -32 to -26°C (-25 to -15°F)
Repeatability	≤ ±0.5% or ≤ ±1°C (±2°F) whichever is greater
Response Time	≤ 0.5 second (95% of reading)
Ambient Operating Range	0 to 50°C (32 to 120°F)
Power	9V Alkaline or NiCd Battery
Weight	320g (11oz)


Features	ST60 ProPlus	ST80 ProPlus
Distance to Spot (D:S)	30:1	50:1
Adjustable Emissivity (from 0.1 to 1.0 by 0.01)	✓	✓
Laser Sighting	offset 8 point circular	offset 8 point circular
Probe Jack	✓	✓
MAX, MIN, DIF and AVG Temperature Display	✓	✓
Recall Last Reading	✓	✓
Data Logging	12 points	12 points
Display Hold (7 seconds)	✓	✓
HI/LO Alarm	✓	✓
LCD Backlight	✓	✓
Display Resolution	0.1°C/F	0.1°C/F
Hard Carrying Case	✓	✓

Options/Accessories

- RTD Temperature Probe
- Nylon Holster
- NIST Traceable Calibration Certificate

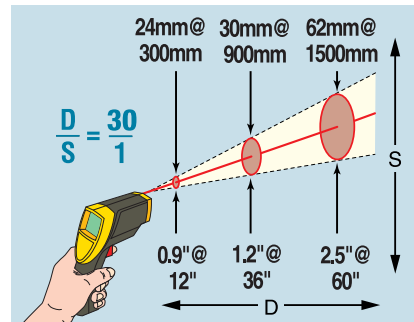

ST60 ProPlus Target Spot Sizes
D:S = 30:1 at Focus Point

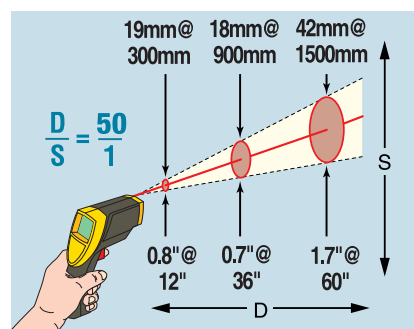

ST80 ProPlus Target Spot Sizes
D:S = 50:1 at Focus Point



Worldwide Headquarters
Raytek Corporation
 Santa Cruz, CA USA
 Tel: 1 800 866 5478
 831 458 1110
 Fax: 1 831 425 4561
 www.raytek.com

South American Headquarters
Raytek do Brasil
 Sorocaba, Brazil
 Tel: 55 15 233 6338
 Fax: 55 15 233 6826

Raytek de Mexico SA de C.V.
 Puebla, Mexico
 Tel: 52 22 30 4380
 Fax: 52 22 30 4438

European Headquarters
Raytek GmbH
 Berlin, Germany
 Tel: 49 30 4 78 00 80
 Fax: 49 30 4 71 02 51

Raytek France
 Palaiseau, France
 Tel: 33 1 64 53 1540
 Fax: 33 1 64 53 1544

Raytek United Kingdom
 Milton Keynes, UK
 Tel: 44 1908 630800
 Fax: 44 1908 630900

Raytek Japan, Inc.
 Tokyo, Japan
 Tel: 81 3 3822 5715
 Fax: 81 3 3822 5712

Raytek China Company
 Beijing, China
 Tel: 86 10 6437 0284
 Fax: 86 10 6437 0285

© 2000 Raytek Corporation, Printed in the USA. (1-1501, Rev. C)
 Raytek®, the Raytek logo, Raynger®, and ST™ are registered trademarks of Raytek Corporation.

Distributed by: